



HYDROGEN

Pressure Transducer AST2000

Overview

The AST2000 series is now available for hydrogen pressure sensing applications. Tested to a variety of hydrogen and automotive standards, the AST2000 series combines the best mechanical design for hydrogen measurement with high performance digital compensation.

Benefits

- One piece design
- All 316L wetted material for optimal compatibility
- No oil-filled cavities leave no chance of containment
- Non-welded diaphragm eliminates leak paths and weak points
- Digitally compensated
- Krystal Bond™ Technology

Applications

- PEM Fuel Cells | Hydrogen Storage
- Hydrogen Filling Stations | Test Stands
- Back Up Power

HYDROGEN

AST2000 Pressure Transducer

Approvals

- EC79 (applicable to table below)
- CE EN61326 (all models)

TUV Approval Files	Pressure Range	Burst Pressure
07-01820/1-TUV	20 Bar (2MPa)	600 Bar
EC79	20 Bar (2MPa)	600 Bar
EC79	350 Bar (35MPa)	2800 Bar
EC79	700 Bar (70MPa)	2800 Bar

Performance @ 25°C (77°F)

Accuracy	< ±0.25% BFSL (Accuracy includes non-linearity, hysteresis & non-repeatability)
Stability (1 year)	±0.25% FS, typical
Over Range Protection	2X Rated Pressure
Pressure Cycles	> 100 Million

Environmental Data

Temperature

Operating	-40 to 85°C (-40 to 185°F)
Storage	-40 to 125°C (-40 to 250°F)

0-100% relative humidity, non-condensing

Thermal Limits

Compensated Range	-10 to 60°C (14 to 140°F)
Thermal Error	±2% of FS (±1% OF FS Optional)

Other

Shock	100G, 11 msec, 1/2 sine
Vibration	20G peak, 20 to 2400 Hz.
EMI/RFI Protection:	Yes
Rating:	IPX6K

HYDROGEN



AST2000 Pressure Transducer

Electrical Data

Output	0.5-4.5V Ratiometric
Excitation	5VDC
Output Impedance	< 100 Ohms, Nominal
Current Consumption:	< 10mA
Bandwidth	(3dB): DC to 3kHz
Output Noise	< 2mV RMS
Zero Offset:	±0.5% of FS
Span Tolerance:	±0.5% of FS
Output Load:	10k Ohms, Min.
Reverse Polarity Protection	Yes

**4-20mA and 1-5V outputs available, contact factory

Dimensions

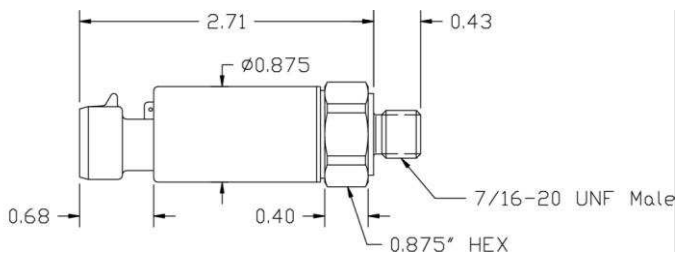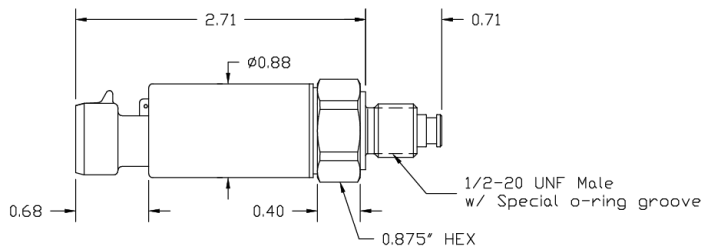

Test Performed

The tests performed are marked as "X" in the following table. The test conditions, parameters, and details are described in the Annex 1. (Test Report) to Technical Report No. KS1011296 dated 2011-01-04.

No.	Type of Test	EU 406/2010 Annex IV	Remark
1	General Requirements	Part 3 Sect. 2	X
2	Technical Requirements	Part 3 Sect. 3	X
3	Hydrogen Compatibility Test	Part 3 Sect. 4.1.1	X
4	Ageing Test*	Part 3 Sect. 4.1.2	X
5	Ozone Compatibility Test**	Part 3 Sect. 4.1.3	Not Applicable
6	Corrosion Resistance Test	Part 3 Sect. 4.2.1	X
7	Endurance Test	Part 3 Sect. 4.2.2	X
8	Hydraulic Pressure Cycle Test	Part 3 Sect. 4.2.3	X
9	Internal Leakage Test	Part 3 Sect. 4.2.4	Not Applicable
10	External Leakage Test	Part 3 Sect. 4.2.5	X
11	Isolation Resistance Testing	ECE R110 Rev. 1	X
12	EMC Compatibility Testing	ECE R110 Rev. 1	X
13	Review of Information Documentation	EU 406/2010 Annex II Part 1	X

* Test applies only for non-metallic materials ** Test applies only to elastomer materials where either a sealing surface is exposed directly to air or if used as a flexible fuel line cover.

Ordering Information

AST2000	F	00500	B	1	F	1	000
Series Type							
Process Connection F= 7/16-20 UNF Male [SAE 4] M= 3/8-24 UNF Male [SAE 3] X= Special (see option code 487)							
Pressure Range* 00020= 20 Bar 00448= 448 Bar 00500= 500 Bar 00700= 700 Bar 00900= 900 Bar * 3/8-24 UNF Male [SAE 3] is only available for 20 bar and 448 bar							
Pressure Unit B= Bar							
Outputs 1= 0.5-4.5V ratiometric							
Electrical F= Packard Metripack 150 3-Pin							
Wetted Material 1= 316L							
Options 000= No Options 384= High Accuracy 487= 1/2-20 UNF Stud for high pressure H ₂ storage							

NORTH AMERICA

American Sensor Technologies, Inc. (AST),
a TE Connectivity company
450 Clark Drive
Mount Olive, NJ 07828 USA
Tel +1 973 448 1901
Fax +1 973 448 1905
info@astsensors.com

ASIA

Hong Kong Sensor Technologies (HKST),
a TE Connectivity company
Unit No. 2 on 24/F., Perfect Industrial
Building, No. 31 Tai Yau Street,
San Po Kong, Kln., Hong Kong
Tel 852 2242 5048
info@hkstsensors.com

TE.com/sensorsolutions

American Sensor Technologies, Inc., a TE Connectivity company.

American Sensor Technologies, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

AST2000H2 10/01/15