




MODEL 3803A ACCELEROMETER

SPECIFICATIONS

- Triaxial DC Accelerometer
- Gas Damped, mV Output
- Hermetically Sealed
- 5,000g Over-Range Protection

The Model 3803A is a triaxial piezoresistive MEMS accelerometer in a rugged welded hermetic package. The accelerometer incorporates mechanical stops for over-range protection up to greater than 5,000g. The model 3803A is offered in ranges from ± 2 to ± 2000 g and is gas damped to provide a wide frequency response. The accelerometer is temperature compensated to provide a stable output over the operating environment.

dimensions

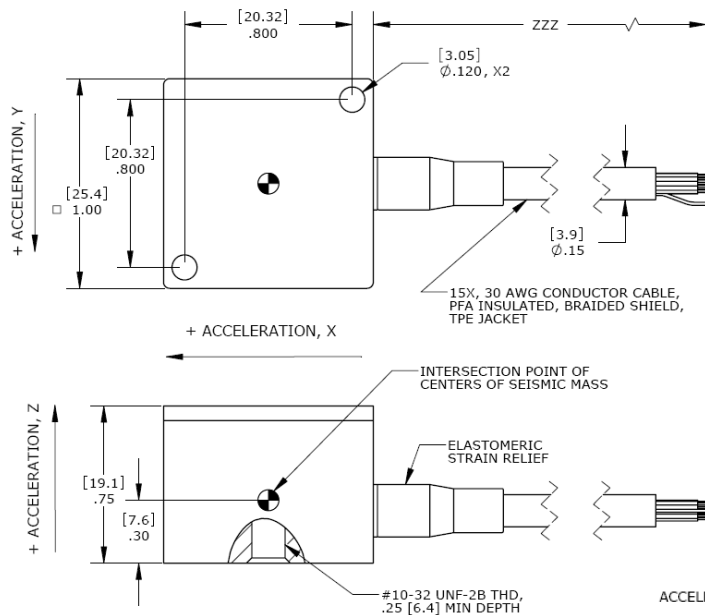


FEATURES

- ± 2 g to ± 2000 g Dynamic Range
- 5,000g Shock Protection
- Hermetically Sealed
- Gas Damping
- mV Output, DC Response
- Stud or Screw Mounting

APPLICATIONS

- Impact Testing
- Structural Testing
- Test and Instrumentation
- Environmental Testing
- Vehicle Testing

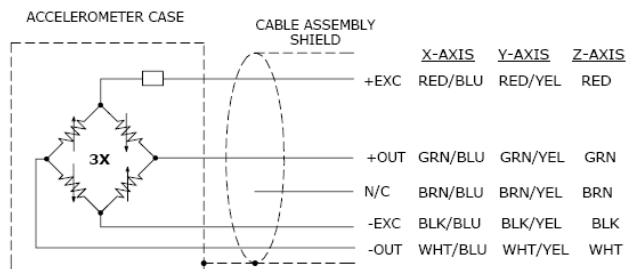

PERFORMANCE SPECIFICATIONS

All values are typical at +24°C, 80Hz and 10Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters									Notes
DYNAMIC									
Range (g)	±2	±10	±20	±50	±100	±200	±500	±2000	
Sensitivity (mV/g)	12	6	3	1.5	0.7	0.7	0.3	0.1	@10Vdc Exc.
Frequency Response (Hz), Z Axis	0-100	0-300	0-400	0-800	0-1200	0-1300	0-1800	0-4000	±5% ¹
Frequency Response (Hz), X&Y Axis	0-100	0-300	0-400	0-600	0-700	0-800	0-1100	0-2500	±1dB
Natural Frequency (Hz)	300	500	1000	3000	5000	6000	7000	10000	
Non-Linearity (%FSO)	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<3	<3	
Damping Ratio	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.3	
Shock Limit (g)	2000	2000	2000	5000	5000	5000	5000	5000	

ELECTRICAL									
Zero Acceleration Output (mV)	±25								Differential
Excitation Voltage (Vdc)	5 to 10								
Input Resistance (Ω)	4000 to 10000								
Output Resistance (Ω)	2400 to 6000								
Insulation Resistance (MΩ)	>100								@100Vdc
Residual Noise (µV RMS)	10								Maximum
Ground Isolation	Isolated from Mounting Surface								

ENVIRONMENTAL									
Thermal Zero Shift (%FSO/°C)	±0.04								
Thermal Sensitivity Shift (%/°C)	±0.05								
Operating Temperature (°C)	-40 to +105								
Compensated Temperature (°C)	-20 to +85								
Storage Temperature (°C)	-40 to +105								
Humidity	Environmentally Sealed, IP65								

PHYSICAL									
Case Material	Stainless Steel								
Weight (grams)	65								
Mounting	2x #4 or M3 Screws, or #10-32 to #10-32 Mounting Stud								
Mounting Torque	18 lb-in (2 N-m)								

Calibration supplied:	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Response Limit ¹
Supplied accessories:	AC-D02995	2x #4-40 (7/8" length) Socket Head Cap Screw and Washer
Optional accessories:	121 140A	3-Channel Precision Low Noise DC Amplifier Auto-zero Inline Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

MODEL 3803A ACCELEROMETER

ORDERING INFO

PART NUMBERING Model Number+Range+Cable Length

3803A-GGG-CCC

 | |
 | |_____Cable (120 is 120 inches)
 |_____Range (050 is 50g)

Example: 3803A-050-120
 Model 3803A, 50g, 120" (10ft) Cable

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
1000 Lucas Way
Hampton, VA 23666
Sales and Customer Service
Tel: +1-800-745-8008 or
+1-757-766-1500
Fax: +1-757-766-4297
t&m@meas-spec.com

EUROPE

MEAS France SAS
a TE Connectivity Company
26 Rue des Dames
F78340 Les Clayes-sous-Bois
France
Sales and Customer Service
Tel: +33 (0) 1 79 33 00
Fax: +33(0)1 34 81 03 59
t&m@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Sales and Customer Service
Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
t&m@meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.