



PRECISION

Pressure & Temperature Transmitter AST20PT

Overview

The AST20PT is a digitally compensated pressure and temperature dual output transmitter, offering measurements from a single process point, reducing process penetration points and leaks. Krystal Bond™ Technology alone offers excellent non-linearity and non-repeatability performance. When it is combined with the ASIC, the AST20PT steps into its own league of high performance pressure sensing at an affordable price.

Benefits

- ASIC Compensation
- Superb Temperature Performance
- Real Time Thermal Compensation
- Real Time Linearity Correction
- Turndown Capability

Applications

- Aerospace
- Analytical Instruments
- Hydraulics
- Hydrogen (Consult factory for media compatibility)
- Labs / Metrology
- Medical
- Military
- Test Stands

INDUSTRIAL

AST20PT Precision Pressure & Temperature Transmitter

Performance @ 25°C (77°F)

Accuracy (Pressure)	< ±0.1% BFSL (< ±0.2% BFSL over 15,000 PSI) (Accuracy includes non-linearity, hysteresis & non-repeatability)
Accuracy (Temp.)	±2%TEB (Accuracy includes non-linearity, hysteresis & non-repeatability)
Stability (1 year)	±0.1% FS, typical
Proof Pressure	2X Rated Pressure, standard (For higher proof pressures, contact factory)
Burst Pressure	5X or 50,000 PSI (whichever is less)

Environmental Data

Temperature

Operating Ambient	-40 to 85°C (-40 to 185°F)
Operating Media	-55 to 125°C (-67 to 257°F)
Storage	-50 to 125°C (-58 to 257°F)

0-100% relative humidity, non-condensing

Thermal Limits

Compensated Range	0-70°C (32 to 158°F)
TC Zero	< ± 0.5% FS
TC Span	< ± 0.5% FS

Other

Shock	100G, 11 msec, 1/2 sine
Vibration	10G peak, 20 to 2000 Hz.
EMI/RFI Protection:	Yes
Rating:	IP-66

Electrical Data


Output	4-20mA+	0-5V, 1-5V	0-10V, 1-10V	0.5-4.5V Ratiometric
Excitation	10-28VDC	10-28VDC	15-30VDC	5VDC, regulated
Current Consumption:	-	< 10mA	< 10mA	< 10mA
Sampling Rate	400 Hz	400 Hz	400 Hz	400 Hz
Output Noise	< 1mV, RMS	< 1mV, RMS	< 1mV, RMS	< 1mV, RMS
Zero Offset:	< ±0.5% of FS	< ±0.5% of FS	< ±0.5% of FS	< ±0.5% of FS
Span Tolerance:	< ±0.5% of FS	< ±0.5% of FS	< ±0.5% of FS	< ±0.5% of FS
Output Load:	0-800 Ohms@10-28VDC	5k Ohms, Min.	5k Ohms, Min.	5K Ohms, Min.
Reverse Polarity Protection	Yes	Yes	Yes	Yes

+For units with loop-powered 4-20mA output, the pressure loop must be powered or the temperature output will not operate.

INDUSTRIAL

AST20PT Precision Pressure & Temperature Transmitter

Dimensions

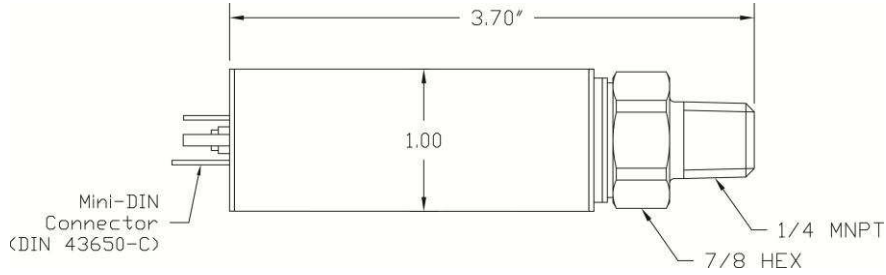

Connector Options	Letter
DIN 43650 C	E
DIN 43650 A	I
6 Pin Bendix	R
M12x1	Y

Threaded Connections	Letter
1/4" NPT Male	A
1/8" NPT Male	B
1/2" NPT Male	P
F250C Female Autoclave	W

INDUSTRIAL

AST20PT Precision Pressure & Temperature Transmitter

Ordering Information

AST20PT	1	A	00500	P	3	E	1	H	000
Series Type									
Temperature Output Range									
1= -40 to 85°C (-40 to 185°F)									
2= -40 to 125°C (-40 to 250°F)									
3= 0 to 70°C (30 to 158°F)									
4= -55 to 125°C (-65 to 250°F)									
5= -18 to 93°C (0-200°F)									
Process Connection									
A = 1/4" NPT Male									
B = 1/8" NPT Male**									
P= 1/2" NPT Male***									
W= F250C Female Autoclave****									
<small>** Not available under 50PSI, not available in 316L</small>									
<small>*** Pressures up to 15,000 PSI</small>									
<small>****Pressures from 10,000 to 45,000 PSI, not available in 316L</small>									
Pressure Range									
Insert 5-digit pressure range code (example: 0-100 PSI = 00100)									
Ranges between 0-25 PSI and 0-45,000 PSI available. Compound pressure up to -14.7 to 500 PSI.									
Pressure Unit									
B= Bar K= kg/cm2 P= PSI									
Outputs									
1= 0.5-4.5V ratiometric									
2= 0-5V(3 wire)									
3= 1-5V									
4= 4-20mA									
5= 0-10V(3 wire)									
G= 1-10V									
Electrical									
A= 2 ft.(0.6m)									
B= 4 ft.(1.2m)									
C= 6 ft.(1.8m)									
D= 10 ft.(3.0m)									
E= Mini DIN 43650C									
I= DIN 43650A									
R= 6- Pin Bendix									
Y= M12x1									
Wetted Material									
0=17-4PH 1=316 L (available up to 10,000 PSI) 2= Inconel 718 (consult factory on availability)									
Fail Condition									
N= Not Specified									
H= Fail High									
L= Fail Low									
Options									
(contact factory for additional options)									
000= No Options									

NORTH AMERICA

American Sensor Technologies, Inc. (AST),
a TE Connectivity company
450 Clark Drive
Mount Olive, NJ 07828 USA
Tel +1 973 448 1901
Fax +1 973 448 1905
info@astsensors.com

ASIA

Hong Kong Sensor Technologies (HKST),
a TE Connectivity company
Unit No. 2 on 24/F., Perfect Industrial
Building, No. 31 Tai Yau Street,
San Po Kong, Kln., Hong Kong
Tel 852 2242 5048
info@hkstsensors.com

TE.com/sensorsolutions

American Sensor Technologies, Inc., a TE Connectivity company.

American Sensor Technologies, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

AST20PT 10/01/15